

# MODELING SEDIMENT YIELDS AT REGIONAL SCALE

Habib-ur-Rehman <sup>1</sup>, Srikanthaerath <sup>2</sup> and Abdul Ghaffar <sup>3</sup>

<sup>1</sup>Civil Engineering Department, University of Engineering & Technology, Lahore, Pakistan.  
email: [mughalhabib@uet.edu.pk](mailto:mughalhabib@uet.edu.pk)

<sup>2</sup>United Nations University, Tokyo, Japan.

e-mail: [srikanthaerath@hotmail.com](mailto:srikanthaerath@hotmail.com)

<sup>3</sup>Civil Engineering Department, BZU, Multan, Pakistan.  
email: [abdulpk@yahoo.com](mailto:abdulpk@yahoo.com)

## ABSTRACT

*Many process based sediment yield models have been developed in the past more than 5 decades like WEPP, EUROSEM and SHETRAN, the application of these models to regional scale remained questionable. Unfortunately, spatial fine resolution data is not yet available at regional and global scales. Even if available, then handling of huge spatial data files is quite difficult on computers, requires long computational efforts to simulate the several hydrological and soil erosion processes for millions of spatial cells in the catchment. Furthermore, it is quite difficult to model soil erosion and sediment transport at regional scales using coarser grid size (1 km) due to slope averaging, land-use and soil type averaging effects. To cater the problem, process-based sediment yield model has been developed to estimate the soil erosion, deposition and sediment yield at regional scale. The catchment's spatial variability is modeled as a regular square grid system with canopy interception, infiltration, depression storage, one-dimensional overland flow and sediment transport in the steepest descent direction. The overland flow is modeled as the equivalent channels, which may represent the cumulative width of all rills and gullies in each grid. The soil erosion processes are modeled as the detachment of soil by the raindrop impact over the entire grid and detachment of soil due to overland flow only within the equivalent channels, whereas sediment is routed to the forward grid considering the transport capacity of the flow and the existing sediment load. The slope averaging effect is taken care by adapting a Fractal analysis approach. The model has been calibrated for Nan river basin (N.13A) and applied to the Yom river basin (Y.6) and Nam Mae Klang river basin (P.24A) of Thailand, simulated results show good agreements with the observed sediment discharge data.*

## 1. INTRODUCTION

The changing scale of model application can have a significant, but poorly understood, impact on the variance of model parameters and thus on their relative importance. The loss of spatial heterogeneity associated with a reduction in spatial scale provides a substantial obstacle to large scale modeling. It is important to consider ways of reproducing such small-scale heterogeneity from large-scale measurements (Zhang *et al.*, 2001).

Considering that, a one-dimensional process-based soil erosion and sediment transport model has been developed to estimate the soil erosion, deposition, transport and sediment discharge at regional scale. The catchment's spatial variability is modeled as a regular square grid system with canopy interception, infiltration, depression storage, one-dimensional overland flow and sediment transport in the steepest descent direction. The overland flow is modeled in the equivalent channels, which may represent the cumulative width of all rills and gullies in each grid. The fraction of the ponded surface is determined on the basis of the flow accumulation value of the each grid, grid size and its land use type.

The soil erosion processes are modeled as the detachment of soil by the raindrop impact over the entire grid surface and detachment of soil due to overland flow only within the equivalent channels, whereas sediment is routed to the forward grid considering the transport capacity of the flow and the existing sediment load (Habib *et al.*, 2001).

For considering the effect of slope averaging, a fractal approach, which was proposed by the Zhang. *et al.* (1999), is adapted for scaling down the slopes and scaling up the model equations for the slope.

The model has been calibrated for Nan river basin (N.13A) and applied to the Yom river basin (Y.6) and Nam Mae Klang river basin (P.24A) of Thailand, simulated results show good agreements with the observed sediment discharge data.

## 2. MODEL DESCRIPTION

The detailed discussion about the developed regional scale soil erosion and sediment transport model is given below:

### 2.1 Proposed overland flow widths

Using the concept of equivalent channels, inter-rill and rill/gully erosion can be modelled in a more physically based manner. The splash detachment is assumed on the entire grid surface which represents the sheet or inter-rill erosion whereas flow detachment and transport is considered within the widths of equivalent channels which represents the rill and gully erosion for each grid of the catchment. After testing the performance by numerical simulations, the equation (1) is proposed to compute the widths of equivalent channels in each grid (Habib *et al.*, 2001):

$$b_{ij} = K_w dx n_{ij}^{0.20} (iflacc)_{ij}^{0.40} \quad (1)$$

Where  $b_{ij}$  is the width of equivalent channel in any cell (m),  $K_w$  is a width adjusting coefficient and a value of 0.016 is found satisfactory for regional scale applications while using 1 km grid size,  $dx$  is the grid size (m),  $n_{ij}$  is Manning's coefficient of roughness value to represent the land use type of the each cell,  $(iflacc)_{ij}$  is the flow accumulation value for the  $i^{\text{th}}$  grid.

### 2.2 Soil detachment due to raindrop impact

The detachment due to the raindrop impact is estimated for each time step using Torri *et al.* (1987) equation.

$$D_R = (1 - C_g) k E_K e^{-zh} \quad (2)$$

where  $D_R$  is the soil detachment by raindrop impact ( $\text{g/m}^2/\text{s}$ ),  $C_g$  is proportion of ground cover in each grid,  $k$  is an index of the detachability of the soil ( $\text{g/J}$ ),  $E_K$  is total kinetic energy of the rain ( $\text{J/m}^2$ ),  $z$  is an exponent ranging between 0.9 to 3.1 and  $h$  is the depth of surface water layer (mm).


The rainfall energy reaching the ground surface as direct throughfall  $E_K(dt)$  is estimated as a function of rainfall intensity using the equation developed by Brandt (1989).

$$E_K(dt) = 8.95 + 8.44 \log(I) \quad (3)$$

Where  $E_K(dt)$  is the kinetic energy of direct throughfall ( $J/m^2/mm$ ),  $I$  is rain intensity ( $mm/hr$ ). The energy of leaf drainage is estimated from the following relationship developed experimentally by Brandt (1990).

$$E_K(ld) = \left[ 15.8 (PH)^{0.5} \right] - 5.87 \quad (4)$$

In which  $E_K(ld)$  is the kinetic energy due to leaf drip ( $J/m^2/mm$ ),  $PH$  is effective height of the plant canopy (m).

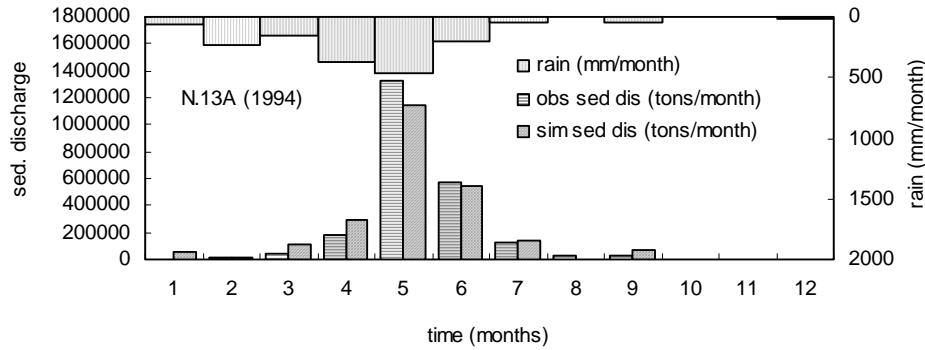

**Figure 1: Simulation results of sediment discharge for Nan river basin at Ban Bun Nak (N.13A)**

$$E_K = (1 - C_C) E_K(dt) H_{dt} + C_C E_K(ld) H_{ld} \quad (5)$$

where  $E_K$  is the total kinetic energy of the rainfall ( $J/m^2$ ),  $C_C$  is canopy cover in the model square grid,  $H_{dt}$  is depth of direct throughfall (total rain (mm)), and  $H_{ld}$  is the depth of leaf drips (net rain (mm)).

### 2.3 Soil detachment due to overland flow

For modeling soil detachment due to overland flow, equations derived by the Ariathurai and Arulanandan (1978) have been used as these equations compute soil detachment on the basis of comparison between critical shear stress and hydraulic shear stress, which is a more realistic approach.

$$D_F = K_f \left( \frac{\tau}{\tau_c} - 1 \right) \quad \text{for } \tau > \tau_c \quad (6)$$

$$D_F = 0 \quad \text{for } \tau \leq \tau_c \quad (7)$$

where  $D_F$  is overland flow detachment ( $Kg/m^2/s$ ),  $K_f$  is overland flow detachability coefficient ( $Kg/m^2/s$ ),  $\tau_c$  is critical shear stress for initiation of motion ( $N/m^2$ ), and  $\tau$  is hydraulic shear stress ( $N/m^2$ ).

Total potential detachment  $[e(x, t)]$  at any cell ( $x$ ) and time ( $t$ ) is then calculated as the sum of splash and flow detachments as given in equation (8).

$$e(x,t) = D_R(x,t) + D_F(x,t) \quad (8)$$

## 2.4 Governing equations for 1-D Kinematic Sediment Transport Routing.

For one-dimensional forward sediment transport routing, the kinematic mass balance equation (Woolhiser, 1990) has been used, which is applied between centers of two consecutive grids  $((i_1, j_1)$  and  $(i_2, j_2)$ ) considering the flow direction matrix. Total detachments are calculated as the sum of the splash detachment and the detachment due to overland flow. After considering the transport capacity of the flow, the total actually detached load ( $e_1(x,t)$ : erosion) is determined which is assumed that flow can carry, and this load is considered as the lateral sediment flow and is added at the inlet of the control volume.

$$\frac{\partial(A C)}{\partial t} + \frac{\partial(Q C)}{\partial x} = 0 \quad (9)$$

Where  $C$  is sediment concentration ( $\text{m}^3/\text{m}^3$ ),  $A$  is cross-sectional area of flow ( $\text{m}^2$ ) and  $Q$  is discharge ( $\text{m}^3/\text{s}$ ).

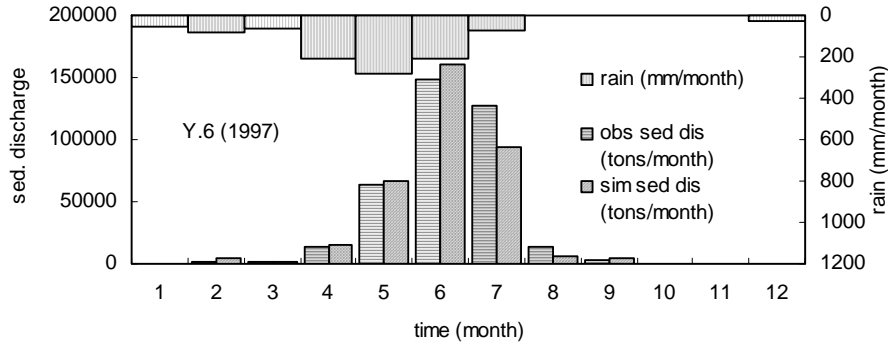


Figure 2: Simulation results of sediment discharge for Yom river basin at Ban Kaeng Luang (Y.6)

## 3. FRACTAL APPROACH FOR SCALING DOWN THE TOPOGRAPHY

According to Zhang *et al.*, (1999), the percentage slope  $S$  is related to its corresponding scale (grid size)  $d$  by the equation.

$$S = \alpha d^{1-D} \quad (10)$$

Where  $D$  is the Fractal dimension. This relationship implies that if topography is fractal, then slope will also be a function of the scale of measurement.

The relationships found by Zhang *et al.* (1999) between fractal dimension ( $D$ ), fractal constant ( $\alpha$ ) and standard deviation of the elevation ( $\sigma$ ) for eastern Asia and south east Spain are:

$$\alpha = 0.33733 \sigma^{1.4004} \quad (11)$$

$$D = 1.13589 + 0.08452 \ln \sigma \quad (12)$$

### 3.1 Adapting Fractal Approach for local topography


For the application of Fractal theory to smaller areas requires estimation of local Fractal parameters. To serve the purpose, the equation for the estimation of Fractal dimension was kept same (12), whereas equation for the Fractal constant ( $\alpha$ ) was revised. And the equation for fractal constant was derived as the best fitted line to the scatter diagram (using second order polynomial) as given in equation (13):

$$\alpha = K_1 \sigma^2 - K_2 \sigma \quad (13)$$

Where  $K_1$  and  $K_2$  were determined from non-linear regression analysis. The equation (10) in view of equations (12) and (13) can be used to obtain the scaled slope at grid size ( $d$ ).

## 4. MODEL CALIBRATION/VALIDATIONS

The model has been calibrated for Nan river basin, the catchment area at Ban Bun Nak (N.13A), Amphoe Sa, Nan is 8551 km<sup>2</sup>. Modeling is carried out for surface flow, therefore, no attempt is made to calibrate the observed hydrographs, but major parameters were adopted from previous hydrological modeling studies (Jha, 1997, and Yang, 1998). We do not expect short term sediment yield to match because damping effect by surface sediment flow is not considered, since all sediment load is generated by major rainstorms, surface modeling should be adequate to explain integrated sediment yield observations. Therefore, parameter calibration is carried out for monthly observed sediment discharges. The monthly simulated results are shown in Figure 1.

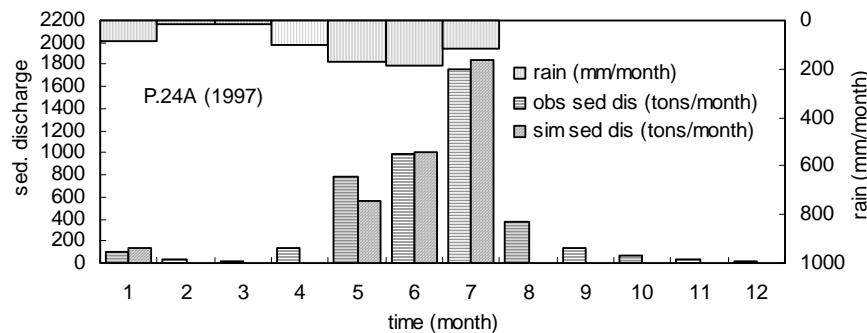

**Figure 3: Simulation results of sediment discharge for Ping river basin at Nam Mae Klang (P.24A)**

The model has been validated for Yom river basin (1997) and the catchment area at Ban Kaeng luang is 12984 km<sup>2</sup>. The monthly-simulated results are shown in Figure 2. Monthly-simulated results are well reproduced except for the 7<sup>th</sup> and 8<sup>th</sup> months. As in 7<sup>th</sup> month there are few rains, and contribution from the surface part only is very small. As sediment generation due to groundwater flow in the river grids is not considered in the simulation so simulated sediment discharge in this month is lesser as compared to the observed sediment discharge. Same is the case for the 8<sup>th</sup> month. This reasoning is justified by simulating the daily sediment discharges by considering the ground water flow contributions in the river grids (Habib, 2001).

The model has been validated for Nam Mae Klang river basin for 1997 (P.24A) having watershed area of 460 km<sup>2</sup>. The monthly-simulated results are shown in Figure 3.

Monthly-simulated results are well reproduced except for the 4<sup>th</sup>, 5<sup>th</sup>, 8<sup>th</sup> and 9<sup>th</sup> months. As in 8<sup>th</sup> month there are no rains and there is no contribution from the surface part. As sediment generation from the river part is not considered in the model, so simulated sediment discharges in these months are lesser as compared to the observed sediment discharges.

## 5. CONCLUSIONS

Developed regional scale soil erosion and sediment transport model can simulate well soil erosion and sediment discharge even at daily temporal scales, whereas sediment discharges are presented at monthly temporal scales (which is sufficient for maintaining the regional scale sediment budgets), without considering the sub-surface and ground water flow components using the same land use and soil related model parameters.

## 6. REFERENCES

- Ariathurai, R. and Arulanandan, K., 1978. Erosion rates of cohesive soils, *Proc. Am. Soc. Civ. Eng., J. Hydrualic. Div.* 104, 279-283.
- Brandt, C. J., 1990. Simulation of size distribution and erosivity of raindrops and throughfall drops, *Earth Surface processes and Landforms* 15, 687-698.
- Brandt, C. J., 1989. The size distribution of throughfall drops under vegetation canopies, *Catena* 16, 507-524.
- Habib-ur-Rehman M., 2001. "Regional scale soil erosion and sediment transport Modeling", *Ph.D. Thesis, University of Tokyo*, 183 pp.
- Jha Raghunath, 1997. Development of Distributed Hydrological Model incorporating surface flow interactions and its application to large tropical catchment, *Ph.D. thesis, University of Tokyo*.
- RID., 1993-1998 *Thailand Hydrological Yearbook*, Royal Irrigation Department, Hydrology Division Bangkok, Water year 1998, Volume 38, 511 pp.
- Torri, D., 1987. Splash detachment: runoff depth and soil cohesion, *Catena* 14, 149-155
- Woolhiser, 1990. KINEROS: A kinematic runoff and erosion model documentation and user manual, *USDA ARS ARS-77*.
- Yang Dawn, 1998. *Distributed hydrologic model using hillslope discretization based on catchment area function: Development and applications*, Ph.D. Thesis, university of Tokyo, Japan, 174 p.
- Zhang Xiaoyong, Nick Drake and John Wainwright, 2001. Scaling Land Surface Parameters for Global Scale Soil-Erosion Estimation, *Water Resources Research* (in press, [http://crs-www.bu.edu/~zhang/water-res/water\\_resc.html](http://crs-www.bu.edu/~zhang/water-res/water_resc.html)), 18 pp.
- Zhang, X.Y., Drake, N.A., Wainwright, J. and Mulligan, M., 1999. Comparison of slope estimates from low resolution DEMs: scaling issues and a fractal method for their solution, *Earth Surface Processes and Landforms*, 24 (9), 763-779.